


47
СИБИРСКОЕ ОТДЕЛЕНИЕ АН СССР
ИНСТИТУТ ЯДЕРНОЙ ФИЗИКИ

V.97
1980

T.A.Vsevolozskaya

THE OPTIMISATION AND EFFICIENCY OF ANTI-PROTON
PRODUCTION WITHIN A FIXED ACCEPTANCE

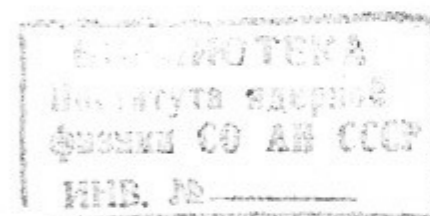

ПРЕПРИНТ 80-222



THE OPTIMISATION AND EFFICIENCY OF ANTI-PROTON
PRODUCTION WITHIN A FIXED ACCEPTANCE

T.A.Vsevolozskaya

Institute of Nuclear Physics
630090, Novosibirsk 90, USSR

A b s t r a c t

The study of optimum conditions of antiproton production within a fixed phase volume - the acceptance of antiproton accumulator or another device, is performed to determine the requirements for optical systems, used for proton focusing onto the target and antiproton collection. Analytical evaluation of particle capture efficiency is carried out and compared to computer simulation results. The possibility to increase the capture efficiency by means of antiproton focusing within the target is considered on the examples of a target with current, providing the distributed focusing through the target length, and a target with concentrated focusing, carried out with lenses placed between target sections.

Antiproton emittance and optimum
targetry conditions

The optimisation of antiproton production inside a fixed phase volume - the acceptance of a storage ring or another device - consists in matching of the acceptance form to a particle distribution in phase space by optimum choice of the target and incident proton beam parameters to provide the high particle density inside the acceptance.

To find the antiproton distribution function in a first approximation one can neglect the elastic nuclear and multiple scattering of protons and antiprotons, the angular spread in the proton beam, and ionization losses of energy in comparison to the production angle and momentum spread of the antiprotons.

The equations determining the distribution function (the kinetic equations) of the antiprotons produced by incident protons interacting in a target, are in this approximation

$$\begin{aligned} \frac{\partial \bar{P}}{\partial z} + \theta \frac{\partial \bar{P}}{\partial r} &= P(r, z) \cdot n_0 \frac{d^2 \bar{z}}{dp d\theta} - \bar{\sigma}_{in} n_0 \bar{P} \\ \frac{\partial P}{\partial z} &= -\sigma_{in} n_0 P \end{aligned} \quad (1)$$

where $P(r, z)$ and $\bar{P}(r, \theta, z, p)$ are the proton and antiproton distribution functions, $\bar{\sigma}$ is the cross section of antiproton production, σ_{in} and $\bar{\sigma}_{in}$ are the proton and antiproton absorption cross sections, n_0 is nuclear density in the target. From the second equation it follows $P(r, z) = P_0(r) e^{-z/\lambda}$, where $P_0(r)$ is the proton distribution across the incident proton beam, $\lambda = \frac{1}{\sigma_{in} n_0}$ - the proton absorption length, and so the equation for $\bar{P}(r, \theta, z, p)$ is

$$\frac{\partial \bar{P}}{\partial z} + \theta \frac{\partial \bar{P}}{\partial r} = P_0(r) e^{-z/\lambda} \cdot n_0 \frac{d^2 \bar{z}}{dp d\theta} - \bar{\sigma}_{in} n_0 \bar{P} \quad (2)$$

After the integration of (2) over transverse phase space with the condition that $\bar{P}(r, \theta, z, p) \rightarrow 0$ at $r, \theta \rightarrow 0$, we have the equation, determining the antiproton yield dependen-

ce on the position z along the target ($0 \leq z \leq L$):

$$\frac{d}{dz} \left(\frac{d\bar{N}}{dp} \right) = N_0 e^{-z/\lambda} n_0 \frac{d\bar{\delta}}{dp} - \bar{\delta}_{in} n_0 \frac{d\bar{N}}{dp}$$

which gives:

$$\frac{d\bar{N}}{dp} = N_0 \frac{d\bar{\delta}}{dp} \frac{e^{-\bar{\delta}_{in} n_0 z} - e^{-\bar{\delta}_{in} n_0 L}}{\bar{\delta}_{in} - \delta_{in}} = N_0 \frac{1}{\delta_{in}} \frac{d\bar{\delta}}{dp} \frac{z}{\lambda} e^{-z/\lambda} \quad (3)$$

where N_0 is the number of incident protons. The maximum value of $\frac{d\bar{N}}{dp}$ occurs at $z = z_m = \frac{\ln(\bar{\delta}_{in}/\delta_{in})}{\delta_{in} n_0}$. Because $\bar{\delta}_{in} \approx \delta_{in}$ one has $z_m \approx \lambda$, and $\left(\frac{d\bar{N}}{dp} \right)_{\max} \approx \frac{N_0 \delta_{in}}{e \lambda}$.

If before integration of (2) we multiply it by r^2 , $r\theta$ and θ^2 in turn there will be the system of equations determining respectively the mean values $\langle r^2 \rangle$, $\langle r\theta \rangle$ and $\langle \theta^2 \rangle$ in dependence on z :

$$\frac{\partial}{\partial z} \left(\langle r^2 \rangle \frac{d\bar{N}}{dp} \right) - 2 \langle r\theta \rangle \frac{d\bar{N}}{dp} = N_0 n_0 \frac{d\bar{\delta}}{dp} e^{-z/\lambda} \langle r^2 \rangle - \bar{\delta}_{in} n_0 \langle r^2 \rangle \frac{d\bar{N}}{dp}$$

$$\frac{\partial}{\partial z} \left(\langle r\theta \rangle \frac{d\bar{N}}{dp} \right) - \langle \theta^2 \rangle \frac{d\bar{N}}{dp} = -\bar{\delta}_{in} n_0 \langle r\theta \rangle \frac{d\bar{N}}{dp} \quad (4)$$

$$\frac{\partial}{\partial z} \left(\langle \theta^2 \rangle \frac{d\bar{N}}{dp} \right) = N_0 n_0 \frac{d\bar{\delta}}{dp} e^{-z/\lambda} \langle \theta^2 \rangle - \bar{\delta}_{in} n_0 \langle \theta^2 \rangle \frac{d\bar{N}}{dp}$$

where θ_0 and r_0 - denote the angle and coordinate of antiproton production. Using (3) the system is easily solved. For small difference between $\bar{\delta}_{in}$ and δ_{in} we have

$$\langle r^2 \rangle = \langle r_0^2 \rangle + \frac{z^2 \langle \theta_0^2 \rangle}{3} \left(1 - z n_0 \frac{\bar{\delta}_{in} - \delta_{in}}{4} + \dots \right)$$

$$\langle r\theta \rangle = \frac{z \langle \theta_0^2 \rangle}{2} \left(1 - z n_0 \frac{\bar{\delta}_{in} - \delta_{in}}{6} + \dots \right)$$

$$\langle \theta^2 \rangle = \langle \theta_0^2 \rangle$$

The values of the $\langle r^2 \rangle$, $\langle r\theta \rangle$ and $\langle \theta^2 \rangle$ determine the effective emittance of the antiproton beam $\bar{\epsilon}_p$ as $\bar{\epsilon}_p = \sqrt{\langle r^2 \rangle \langle \theta^2 \rangle - \langle r\theta \rangle^2}$, its envelope function β_p as $\beta_p = \frac{\langle r^2 \rangle}{\bar{\epsilon}}$, the distance to the beam waist from the target exit:

as $\Delta z = -\frac{\langle r\theta \rangle}{\langle \theta^2 \rangle}$, and the value of β_p in it as $\beta_{p,min} = \frac{\bar{\epsilon}_p}{\langle \theta^2 \rangle}$. For an extremely thin proton beam ($\langle r_0^2 \rangle \ll \frac{z^2 \langle \theta_0^2 \rangle}{12}$) and $\bar{\delta}_{in} = \delta_{in}$ these are $\bar{\epsilon}_p = \frac{z \langle \theta_0^2 \rangle}{2\sqrt{3}}$, $\Delta z = -\frac{z}{2}$, $\beta_{p,min} = \frac{z}{2\sqrt{3}}$ (5). The emittance value at a target length corresponding to the maximum antiproton yield, i.e. $z \approx \lambda$, can be taken as an characteristic emittance $\bar{\epsilon}_0$ of an antiproton production for chosen antiproton momentum and target material. The linear dependence of $\bar{\epsilon}_p$ on target length whereas the time of antiproton yield is proportional to $z e^{-z/\lambda}$ shows that the optimum z is considerably smaller than λ if the antiprotons are captured into the acceptance much smaller than $\bar{\epsilon}_0$.

To determine the production angle it is convenient to use the thermodynamic description of the transverse momentum distribution $\omega(p_\perp) dp_\perp^2 \propto \sqrt{m_\perp} \exp(-\frac{m_\perp}{T})$ (6), which agrees well enough with experimental data at small value of p_\perp ($p_\perp^2 \ll m^2$) when the temperature T is taken of the order of π -meson's mass, $T \approx m_\pi$. The m_\perp in (6) is transverse mass $m_\perp = \sqrt{m^2 + p_\perp^2}$. The angular distribution which follows from (6) is nearly Gaussian with mean square of angle $\langle \theta_0^2 \rangle \approx \frac{2mT}{p^2} \approx \frac{2mm_\pi}{p^2}$, where m and p are the antiproton mass and momentum. So the production emittance for the antiprotons with momentum p is $\bar{\epsilon}_0 \approx \frac{mm_\pi \lambda}{\sqrt{3} p^2}$.

The equation which determines the number of antiprotons N_ϵ , captured into the acceptance ϵ , is obtained after an integration of (2) over angles and transverse coordinates inside the acceptance. Then one easily sees that on the left side there remains the term $\frac{\partial}{\partial z} \int^\epsilon \bar{p} d^2r d\theta = \frac{dN_\epsilon}{dz}$ only agreement with conservation of phase space by free particle motion. So we have

$$\frac{dN_\epsilon}{dz} = n_0 e^{-z/\lambda} \int^\epsilon P_0(r) \frac{d^2\bar{\delta}}{dp d\theta} d^2r d\theta - \bar{\delta}_{in} n_0 N_\epsilon \quad (7)$$

where Δp is a momentum bite captured.

To determine the sphere of integration in the right side of (7) we must use the dependence of acceptance β - and α - or γ - and α - functions on longitudinal target coordinate z . The second couple is preferable because the γ -function has a constant value in a drift determined by the value of

β - function in a waist β_{min} as $\gamma = \frac{1}{\beta_{min}}$. The of acceptance has, evidently, to be zero at the waist of the anti-proton beam, i.e. in the target centre by $\delta_{in} = \delta_{in}$. Thus α is related to the γ and β_{min} as $\alpha = -\gamma(z - \frac{L}{2}) = -\frac{1}{\beta_{min}}(z - \frac{L}{2})$, where L is the target length.

Let the proton beam have a radius r_0 less than the coordinate size of the acceptance in its minimum, $r_0 < \sqrt{\frac{\epsilon}{\gamma}} = \sqrt{\epsilon \beta_{min}}$. Then for Gaussian distribution of antiproton production angles, $\frac{d^2\delta}{dpd\theta} = \frac{d\delta}{dp} \frac{\exp(-\theta^2/\langle\theta_0^2\rangle)}{\pi\langle\theta_0^2\rangle}$, and $\delta_{in} \cong \delta_{in}$ we have

$$N_\epsilon = n_0 \frac{d\delta}{dp} e^{-\frac{L}{\lambda}} \int_0^L \int_0^{2\pi} \int_0^{r_0} \text{erf} \frac{\delta_x}{\sqrt{\langle\theta_0^2\rangle}} \text{erf} \frac{\delta_y}{\sqrt{\langle\theta_0^2\rangle}} P_0(r) r dr d\varphi dz \quad (8)$$

where $\delta_x = \left[\frac{z^2 \gamma^2}{2} + \sqrt{\epsilon \gamma (1 + \frac{z^2 \gamma^2}{4})} - x^2 \gamma^2 \right] / (1 + \frac{z^2 \gamma^2}{4})$ and the same for δ_y with $y = r \sin \varphi$ replacing the $x = r \cos \varphi$. For infinitely thin proton beam, $P_0(r) = N_0 \delta(x) \delta(y) = \frac{N_0}{2\pi r} \delta(r)$, the expression (8) is simplified to

$$N_\epsilon = N_0 n_0 \frac{d\delta}{dp} e^{-\frac{L}{\lambda}} \int_0^L \left[\text{erf} \sqrt{\frac{\epsilon \gamma}{\langle\theta_0^2\rangle (1 + \frac{z^2 \gamma^2}{4})}} \right]^2 dz \quad (9)$$

In the case where the range of angles captured is small compared to the range produced, $\epsilon \gamma \ll \langle\theta_0^2\rangle$, the expression under the integral can be expanded in a series, and taking into account only the first term we have

$$N_\epsilon \cong N_0 n_0 \frac{d\delta}{dp} \frac{1}{\delta_{in}} \frac{d\delta}{dp} \frac{8 \epsilon e^{-L/\lambda}}{\pi \lambda \langle\theta_0^2\rangle} \text{arc tg} \frac{L \gamma}{2} \quad (10)$$

If we set the value of γ of the acceptance at the target equal to that of the antiproton beam, $\gamma = \frac{2\sqrt{3}}{L}$, which is close to optimum for the acceptance not too small compared to ϵ_0 , we have

$$N_\epsilon = \frac{N_0}{\delta_{in}} \Delta p \frac{d\delta}{dp} \frac{8}{3} \frac{\epsilon e^{-L/\lambda}}{\lambda \langle\theta_0^2\rangle} \quad (11)$$

Here we see the exponential decrease of N_ϵ with target length when $L = \frac{2\sqrt{3}}{\gamma} \gg 2\sqrt{3} \frac{\epsilon}{\langle\theta_0^2\rangle}$.

To find the optimal target length L_{opt} by the accepted dependence of γ on L we have to solve the equation $\frac{\partial N_\epsilon}{\partial L} = 0$. Taking into account two terms of the series in the right side of (9) we have

$$L_{opt} \cong 1.28 \lambda \sqrt{\frac{\epsilon}{\lambda \langle\theta_0^2\rangle}} (1 + 0.64 \sqrt{\frac{\epsilon}{\lambda \langle\theta_0^2\rangle}} + \dots) \quad (12)$$

$$N_\epsilon(L_{opt}) \cong \frac{N_0}{\delta_{in}} \frac{d\delta}{dp} \Delta p \frac{8}{3} \frac{\epsilon \exp(-L_{opt}/\lambda)}{\langle\theta_0^2\rangle (\lambda + L_{opt})}$$

For finite radius of a proton beam and uniform particle distribution in it the expression for L_{opt} is $L_{opt} = \sqrt{R} (1 + \frac{1}{2} \sqrt{R} + \dots)$ (13), where

$$R = 1.65 \left(\frac{\epsilon}{\lambda \langle\theta_0^2\rangle} + \frac{3}{8} \frac{r_0^2}{\epsilon \lambda} \right)$$

For very small values of acceptance the $\gamma = \frac{2\sqrt{3}}{L}$ may appear to be far from optimum. To optimize it together with L we have to solve the equation $\frac{\partial N_\epsilon}{\partial \gamma} = 0$ together with $\frac{\partial N_\epsilon}{\partial L} = 0$. This solution leads to the next expressions for γ_{opt} , L_{opt} , and $N_{\epsilon, max}$:

$$\beta_{opt} \cong \frac{1}{\gamma_{opt}} = \frac{\lambda}{\pi} \frac{R^{2/3}}{1 - \frac{4}{3\pi} R^{1/3}}$$

$$L_{opt} \cong \frac{2\lambda}{\pi} \frac{R^{1/3}}{(1 - \frac{4}{3\pi} R^{1/3})^2} \quad (14)$$

$$N_{\epsilon, max} \cong \frac{N_0}{\delta_{in}} \frac{d\delta}{dp} \Delta p \frac{4 \epsilon e^{-L_{opt}/\lambda}}{\langle\theta_0^2\rangle \lambda} \left(1 - \frac{4}{3\pi} R^{1/3}\right)^3$$

At the limit $R \rightarrow 0$ the value of $N_{\epsilon, max}$ (Eq. 14) differs from N_ϵ (Eq. 12) by a factor of 1.5 times, but already at $R \sim 10^{-2}$ the difference is less than 10%. The thin proton beam condition $r_0^2 \ll \frac{8}{3} \frac{\epsilon^2}{\langle\theta_0^2\rangle}$, following from (13) and (14), is sufficiently more strict than obtained by the antiproton beam emittance definition (see (5)). This difference is due to the strong inhomogeneity of the antiproton distribution at small

angles and coordinates, which does not influence sufficiently on the integral characteristics of whole distribution.

Analytical estimates of the optimum values of capture efficiency, collection angle, target length and of the efficiency dependence on proton beam size are well consistent with results of computer simulation (see Fig. 1-4), in which the multiple and elastic nuclear scattering of protons and antiprotons, the difference in their absorption lengths, the angular spread and real coordinate distribution in proton beam were taken into account. The capture efficiency is characterized with a function F equal to the ratio of the number of antiprotons captured to the number of would be produced in whole transverse phase space by interaction of all primary protons without antiproton absorption. The F equals to 1 in the case of an infinitely large acceptance, long and thin target and thin proton beam. The number of antiprotons captured is determined with F as

$$N_{\epsilon} = N_0 \cdot \frac{d\bar{\epsilon}}{dp} \cdot \frac{\Delta p}{\delta_{in}} \cdot F = N_0 \cdot \frac{d^2\bar{\epsilon}}{dpd\theta} \cdot \frac{\Delta p}{\delta_{in}} \cdot \pi \langle \theta^2 \rangle \cdot F \quad (15)$$

In Fig. 1 it is shown the F dependence on an acceptance value at optimum values of acceptance γ -function, at Fig. 2 - on a mean square of proton beam radius, which for the uniform particle distribution inside a cylinder $r_0 \leq r_{max}$, postulated in analytical evaluation, is $\langle r_0^2 \rangle = \frac{1}{2} \cdot r_{max}^2$. In computer simulation the proton distribution across the beam is taken for Gaussian. Difference in curves in Fig. 2 at very small $\langle r_0^2 \rangle$ is due to influence of angular spread in the proton beam, when this spread, increasing with beam size decrease at a finite value of beam emittance, becomes of the order of or more than the range of angles captured. The F dependence on target length (Fig. 3) is shown for target with very large cross section and for thin one with a cross section of the order of proton beam cross section. At a large L the thin target gives a marked gain due to the smaller absorption of antiprotons, but the difference in F at optimum target lengths

does not exceed 15%.

The optimisation of antiproton capture into an accumulator includes the optimum choice of injection momentum. This choice is determined by the energy dependence of production cross-section and by the accumulation scheme. In the case of antiproton deceleration before cooling, as in the INP-IHEP project /1/, the maximum accumulation rate is achieved by the injection at a momentum, corresponding to the maximum of $p \frac{d^3\bar{\epsilon}}{dp^3}$, the cross section of antiproton production within a phase volume element $\frac{d^3p}{p}$, which is conserved at the adiabatic particle deceleration. This element contains in a product $p^2 \epsilon \frac{\Delta p}{p}$ in eq. (12) (or (14)), when as a result of the relation $\frac{d\bar{\epsilon}}{dp} = \pi \langle \theta^2 \rangle \frac{d^2\bar{\epsilon}}{dpd\theta} \Big|_{\theta=0}$ use it turns into

$$N_{\epsilon} = N_0 \cdot \frac{1}{\delta_{in}} \cdot p \frac{d^3\bar{\epsilon}}{dp^3} \Big|_{\theta=0} \cdot \frac{8\pi}{3} \cdot \frac{e^{-L_{opt}/\lambda}}{\lambda + L_{opt}} \cdot p^2 \epsilon \frac{\Delta p}{p}$$

The dependence of $p \frac{d^3\bar{\epsilon}}{dp^3}$ on p for proton energy $E_0 = 70$ GeV is shown in Fig. 5. The solid line, plotted with the use of the old IHEP experimental data extrapolated to low momenta under the symmetry of the invariant cross-section versus c.m.s. rapidity, shows that the maximum of $p \frac{d^3\bar{\epsilon}}{dp^3}$ lies near 5.5 GeV/c. As the more recent data compilation shows the maximum is rather shifted down to 4,5 GeV/c. In case of the stochastic cooling of the antiproton momentum spread before the deceleration, as in the FNAL project /2/, the cross-section $\frac{d^2\bar{\epsilon}}{dpd\theta}$ has to be maximized.

Antiproton collection

Antiproton collection from the target requires an optic system with a large angular acceptance and a short focal distance. The optimum collection angle ϑ_c is determined by values of the acceptance and its γ -function at the target as $\vartheta_c = \sqrt{\epsilon \gamma}$. For $\gamma = \gamma p$ (eq. 5), $r_0 \approx 0$ and $L = L_{opt}$ (eq. 12) it is $\vartheta_c \approx 1.65 \left(\frac{\epsilon \langle \theta^2 \rangle}{\lambda} \right)^{1/4}$. The restriction of focal distance does not directly follow from the above consideration of optimum tar-

getry conditions. It arises from the beam emittance distortion in the lens due to aberration, particle scattering and so on. And it is most strict in a case of small acceptance, because, thanks to sharp maximum of antiproton density at the center of emittance, the aberration increase of particle angles or coordinates does not lead to the marked reduction of capture efficiency when this increase is small compared to the corresponding dimension of acceptance only. Thus the restriction of aberration (or scattering) angle α_{ab} , being also the restriction of lens focal distance f , is:

$$\langle \alpha_{ab}^2 \rangle < \frac{\epsilon}{\beta} \approx \frac{\epsilon \beta_0}{f^2} \quad (16)$$

where ϵ is the value of acceptance, β - its beta-function in the lens, related to that in a particle source β_0 as $\beta = \beta_0 + \frac{f^2}{\beta_0}$. Figure 4 shows the efficiency of antiproton collection with different optic systems - lithium lenses /3/ with focal distances $f = 10$ cm and 20 cm, parabolic lenses (magnetic horns) with $f = 20$ cm, made of berillium and aluminium, and quadrupole triplet /4/ - compared with ideal focusing for the FNAL project parameters ($\epsilon = 5 \cdot 10^{-6}$ m.rad, $pc = 4.5$ GeV, $\frac{\Delta p}{p} = \pm 2\%$). In the case of lithium and parabolic lenses the capture efficiency reduction is mainly due to nuclear absorption and multiple scattering, in the case of triplet - to chromatic aberration /5/. The lithium lenses considered /3/ have 6 cm length l , 0.25 cm (for $f = 10$ cm) and 0.5 cm (for $f = 20$ cm) end berillium flanges thicknesses, 1 cm and 2 cm aperture diameters, 140 KOe maximum field. Under a focusing, characterized with particle oscillation frequency ω , the multiple scattering in lithium results in the mean square angle $\langle \theta^2 \rangle_{Li}$ less by a factor of $\frac{1}{2} (1 + \frac{\sin 2\omega l}{2\omega l})$ than $\langle \theta^2 \rangle_{Li}$ without focusing. When $f = 10$ cm, the angle of scattering in lithium and berillium flanges, $\sqrt{\langle \theta^2 \rangle} = 7 \cdot 10^{-4}$ rad, meets the condition (16) and losses in capture efficiency scarcely exceed nuclear losses. At $f = 20$ cm the multiple scattering leads to a marked loss in capture efficiency.

As it is seen from the first item, the effective transverse antiproton beam emittance on the condition of infinitely thin proton beam arises from the target length - the spread of longitudinal production coordinate z turns into transverse coordinate r spread in a beam cross section in accordance with dependence (the linear one) of r on z . Full fourdimensional transverse beam phase volume remains zero because of zero value of particle φ - velocities. Changing the dependence r on z one can decrease the transverse antiproton beam emittance and, hence, increase the particle density inside the acceptance.

Antiproton focusing with magnetic field of a current passing through the target along the beam axis /b/, at high enough current value, eliminates the emittance dependence on target length. It allows to extend the target length up to the value corresponding to the maximum antiproton yield. The antiproton beam emittance in this case is determined by the field gradient only and, in principle, can be done small enough to provide high capture efficiency. The maximum value of F is determined by nuclear target efficiency, i.e. $F \approx e^{-1}$ at $\delta_{in} = \delta_{in}$, if proton defocusing in the target may be neglected. To take the antiproton focusing into account in kinetic equations, we have to add the term $-\omega^2 r \frac{\partial p}{\partial \theta}$ to the left hand side of the first equation of system (1). On the left hand sides of the second and third equations of system (4) there appear the terms $\omega^2 \langle r^2 \rangle \frac{dN}{dp}$ and $2\omega^2 \langle r\theta \rangle \frac{dN}{dp}$, respectively. At $\delta_{in} = \delta_{in}$, taking into account (3), one obtains

$$\begin{aligned} \langle \theta^2 \rangle &= \frac{\langle \theta_0^2 \rangle}{2} \left(1 + \frac{\sin 2\omega z}{2\omega z} \right) \\ \langle r^2 \rangle &= \frac{\langle \theta_0^2 \rangle}{2\omega^2} \left(1 - \frac{\sin 2\omega z}{2\omega z} \right) \\ \langle r\theta \rangle &= \frac{\langle \theta_0^2 \rangle}{4\omega^2 z} (1 - \cos 2\omega z) \end{aligned} \quad (17)$$

where $\omega = \sqrt{\frac{qG}{pc}}$ - the frequency of antiproton oscillation in a field inside the target, G - field gradient, p and q - antiproton momentum and charge. The effective emittance of antiproton beam is

$$\epsilon_{\bar{p}} = \frac{\langle \theta_0^2 \rangle}{2\omega} \sqrt{1 - \frac{\sin^2 \omega z}{\omega^2 z^2}}$$

At fixed ω the antiproton emittance achieves the value close to the limit $\lim_{z \rightarrow \infty} \epsilon_{\bar{p}} = \frac{\langle \theta_0^2 \rangle}{2\omega}$ already at $z \cong \frac{\pi}{2}$, but this value slightly differs from the emittance for a target of optimum length without field. It means that to obtain the marked gain in capture efficiency, the field gradient has to be large enough to enable the equality $\omega z = \frac{\pi}{2}$ at a z less than the optimum target length without field L_{opt} , determined by eq. (12) (or eq. (14) for very small ϵ compared to $\lambda \langle \theta_0^2 \rangle$). So we have $\omega > \frac{\pi}{2L_{opt}} \cong \sqrt{\frac{\langle \theta_0^2 \rangle}{\epsilon \lambda}}$ and $G > \frac{2mm\pi c^3}{q p \epsilon \lambda}$. For the INP-IHEP antiproton source project /1/ ($\epsilon = 6 \cdot 10^{-5}$ mrad, $pc = 5.5$ GeV) it means $G > 0.27$ MOe/mm. The estimate for the FNAL project with L_{opt} determined in eq. (14) gives

$$G > 2 \text{ MOe/mm.}$$

At $\omega L \gg \frac{\pi}{2}$, infinitely thin proton beam, and $\delta_{in} \cong \delta_{in}$ the capture efficiency into acceptance ϵ is found as $F = e^{-1} \cdot [\text{erf} \sqrt{\frac{\epsilon \omega}{\langle \theta_0^2 \rangle}}]^2$ (18), but the applicability of this expression is restricted by proton defocusing in the target.

Effect of proton defocusing on antiproton capture efficiency F for the FNAL and IHEP beam parameters is clearly seen (Fig. 6 and 7) from the comparison of F dependence on field gradient G at different values of proton energy E_0 and of beam emittance ϵ_p ($\epsilon_p \propto \frac{1}{E_0}$) and β - function in the target β_p ($\beta_p \propto E_0$), accordingly. Figure 6b shows the dependence of optimum target length L_{opt} on G in the case of Fig. 6a. Decrease of L_{opt} with an increase of G above some value also evidences the effect of proton defocusing.

Antiproton focusing inside the target leads to some decrease of angular spread at target exit (see eq. (17)). At a fixed value of emittance $\epsilon_{\bar{p}}$ it means the increase of beam β - function in the waist, $\beta_0 = \frac{\epsilon_{\bar{p}}}{\langle \theta^2 \rangle}$, as compared to its

value in the case of target without field at the same value of $\epsilon_{\bar{p}}$.

This increase is maximum at $\omega L \cong 0.7\pi$ and is characterized by a factor of about 2.5. Hence the increase of beta-function of acceptance β without losses in phase particle density does not exceed significantly the factor 2 or 3. In the case of figure 6 the optimum β of acceptance is maximum and equals ~ 7 mm at $G \sim 2$ MOe/mm. At $\omega L \gg \frac{\pi}{2}$, $\beta \cong \omega^{-1}$.

Magnetic field with gradient of several MOe/mm requires very high current density in ^{the} target ($j \frac{A}{mm^2} = \frac{1}{2\pi} G \frac{Oe}{mm}$), accompanied with very high density of resistive energy deposition. It leads to thermal distortion of the target for a very short time which can be less than the proton spill duration. With taking into account the alteration of target material electro-conductivity δ as $\delta = \frac{\delta_0}{1 + \beta Q}$ /7/, the time of target heating up to the melting temperature T_{melt} is determined as follows:

$$t = \frac{\delta_0 \ln(1 + \bar{\alpha} \cdot T_{melt})}{\beta^2 \bar{j}^2} \quad (18)$$

where δ_0 is the initial value of δ , β - its thermal coefficient, nearly constant in the temperature interval from 20°C to T_{melt} , $\bar{\alpha}$ - the mean value of temperature coefficient, Q - the density of deposited energy, \bar{j}^2 - mean square value of current density. For tungsten target ($\delta_0 = (5.5 \cdot 10^{-5} \text{ Ohm} \cdot \text{mm})^{-1}$, $\beta = 1.8 (\text{J/mm}^3)^{-1}$, $\bar{\alpha} = 5.8 \cdot 10^{-3} (\text{°C})^{-1}$, $T_{melt} = 3380 \text{°C}$) the heating time is

$$t, s = \frac{1.2 \cdot 10^{-6}}{(G, \text{ MOe/mm})^2} \quad (19)$$

Deposition of energy for melting increases this time not more than by 15%, and so the target distortion under field gradient of several MOe/mm begins sooner than in a microsecond. It agrees very well with the results of experimental study of target behaviour at such fields, carried out in the INP /6,8/ in

1968. So, the short "life-time" of the target narrows the applicability range of current targets despite of all their attractiveness.

Another way to increase phase density of antiprotons inside the acceptance /9/ consists in replacing the target by several short ones with strong lenses placed between them to focus the antiprotons from one target to another. In this case the trajectories of antiprotons produced in different targets coincide and the whole beam emittance does not exceed the emittance from one short target. The optimum value of summary target length $L_{opt}^{(N)}$ depends on the number of targets N as

$$L_{opt}^{(N)} = N \cdot L_i^{(N)} \cong \sqrt{RN} \left(1 + \frac{1}{2} \sqrt{RN} + \dots\right) \\ i=1,2,3,\dots,N$$

where R has the same value as in eq. (13). The value of beam γ -function is determined by the length of one target $L_i^{(N)}$, $\gamma_{\beta} = \frac{2\sqrt{3}}{L_i^{(N)}} \sim \frac{2\sqrt{3}}{\lambda \sqrt{R}} \sqrt{N}$. Thus the acceptance γ , equal to γ_{β} , and solid collection angle $\pi \vartheta_c^2 = \pi E \gamma$ increase with N as \sqrt{N} together with the same increase of summary target length, and so the capture efficiency increases approximately as N :

$$F = \frac{8}{3} N \frac{\epsilon}{\langle \theta_0^2 \rangle} \frac{\exp(-L_{opt}^{(N)}/\lambda)}{L_{opt}^{(N)} + \lambda} \quad (20)$$

The transformation of expressions (14) to the case of N targets also consists in replacing R by product RN and in multiplying the expressions for γ_{opt} and F by N .

The lenses between targets must have the shortest focal distances to minimize the aberration effect and the length of whole system, which determines the value of proton beam β -function at the targets. For lithium lens, occupying all the distance between targets d , the value of d is related to maximum field in a lens as $H_{max} \cdot d = \pi \sqrt{E \gamma} \frac{pc}{q}$. For $H_{max} \sim 300 \text{ KOe}$ using the dependence of optimum $\gamma = \gamma_{\beta}$ on E one obtains $d \text{ (cm)} = 0.5 [pc \text{ (GeV)}]^{3/2} \cdot [N \cdot E \text{ (cm.rad)}]^{1/4}$.

For practically interesting values of ϵ and p the value of d can not be done significantly shorter than 10 cm, and so the large proton beam β -function, $\beta \sim d(N-1)$, and antiproton absorption in lithium on the length $\sim d(N-1)$ restrict the range of effective applicability of such targetry scheme.

Acknowledgements

Author is thankful to G.Silvestrov for very useful discussions and advices, to J.Maclachlan for a literature reduction of the first part of english variant of the paper.

References

1. T.A.Vsevolozhskaya et al. The Antiproton Source for UNC IHEP. Contribution to VII All Union Conf. on Particle Accelerators, Dubna, October 14-16, 1980.
2. Design report. The Fermilab High-Intensity Antiproton Source, FNAL, October 1979.
3. B.F.Baianov et al. Proc. XI Int. Conf. on High Energy Accelerators, Geneva, CERN, 1980.
4. Beam Transport and Target System for pp and p \bar{p} Colliding Beams, FNAL 06/20/78.
5. T.Vsevolozhskaya. The Chromatic Aberration of Lenses with Large Angular Acceptance, INP report 80-221, Novosibirsk, 1980.
6. G.I.Budker, T.A.Vsevolozhskaya, G.I.Silvestrov, A.N.Skrinsky. Proc. of II All Union Conf. on Particle Accelerators, Moscow, vol. 2, 196 (1972).
7. H.Knoepfel. Pulsed High Magnetic Fields, London 1970.
8. V.M.Highdarov. The Installation for Study of the Possibility of Magnetic Field of 1-2 MG Production at Tangsten Rod Surface and the Rod Behaviour Study. Graduation Work, INP, 1968.
9. G.I.Budker, T.A.Vsevolozhskaya et al. Proc. of V All Union Conf. on Particle Acceleration, Moscow, vol. II, 299 (1977).
10. F.Binon et al. Phys. Lett. 30B, 506, 1969.
11. Yu.M.Antipov et al. Phys. Lett. 34B, 165, 1971.
12. N.I.Bozhko et al. IHEP report 79-78, Serpukhov, 1979.
13. L.M.Barkov et al. The Chanal for Intensive Secondary Particle Beams of Low Energy at PS of the IHEP. Contribution to VII All Union Conf. on Particle Accelerators, Dubna, October 14-16, 1980.

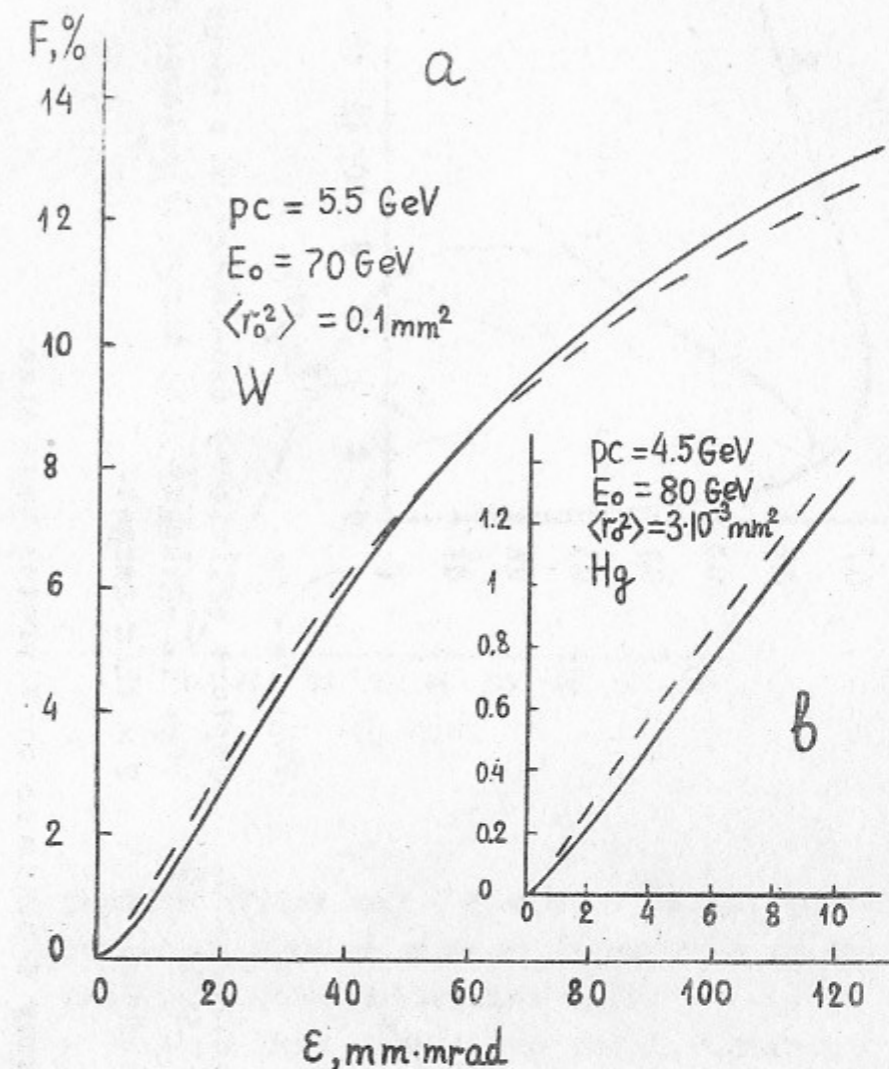


Fig. 1. Capture efficiency dependence on an acceptance value from computer simulation (solid lines) and equations (13) - (a) and (14) - (b) (dashed lines). Antiproton and proton momenta, mean square proton beam radius, and target material are written.

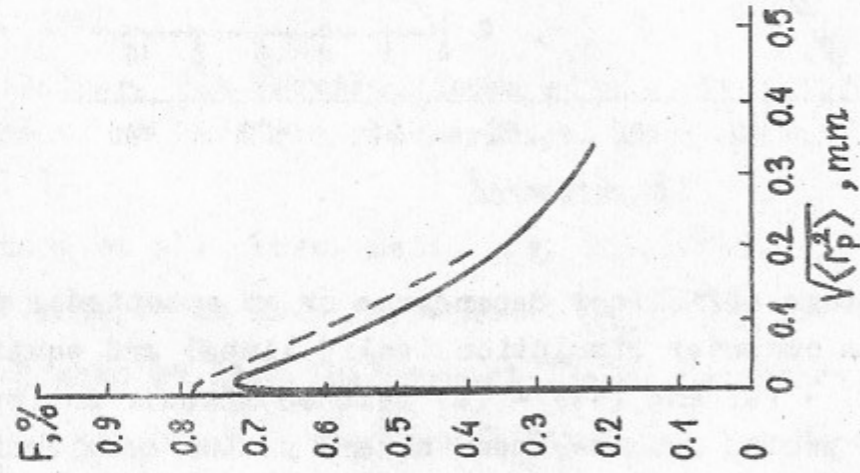


Fig. 2. Capture efficiency dependence on a proton beam size from computer simulation (solid line) and eq. (14) (dashed line).

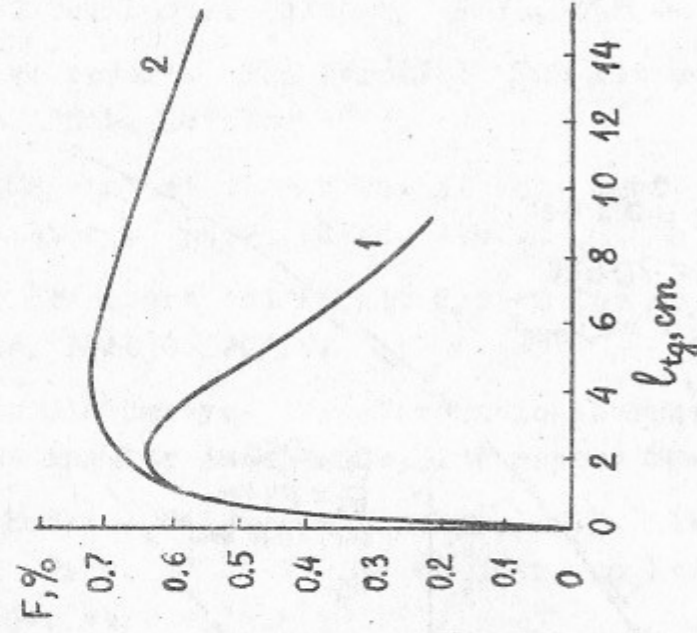


Fig. 3. Capture efficiency dependence on a target length for the: 1. - target with infinitely large cross-section, 2 - thin target.

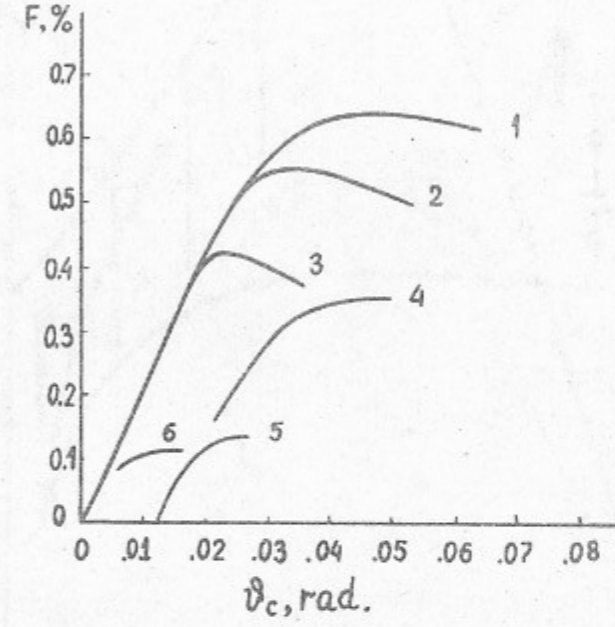


Fig. 4. Capture efficiency ($\varepsilon = 5 \cdot 10^{-6}$ mrad, $p_c = 4.5$ GeV) versus an angular size of acceptance at the target under the antiproton collection with: 1 - ideal lens; 2 - lithium lens with 10 cm focal distance f , 6 cm length l , ϕ 10 mm aperture, 2.5 mm end berillium flanges thickness Δ ; 3 - lithium lens with $f = 20$ cm, $l = 6$ cm, ϕ 20 mm, $\Delta = 5$ mm; 4 and 5 - linear parabolic lenses with $f = 20$ cm, 5 mm neck diameter, $\Delta(r) = \frac{5}{r(\text{mm})}$ mm wall thickness, made of berillium and aluminium, respectively; 6 - quad triplet with ~ 1 m lengths, ~ 0.7 m drifts, ~ 1 KOe/cm field gradient.

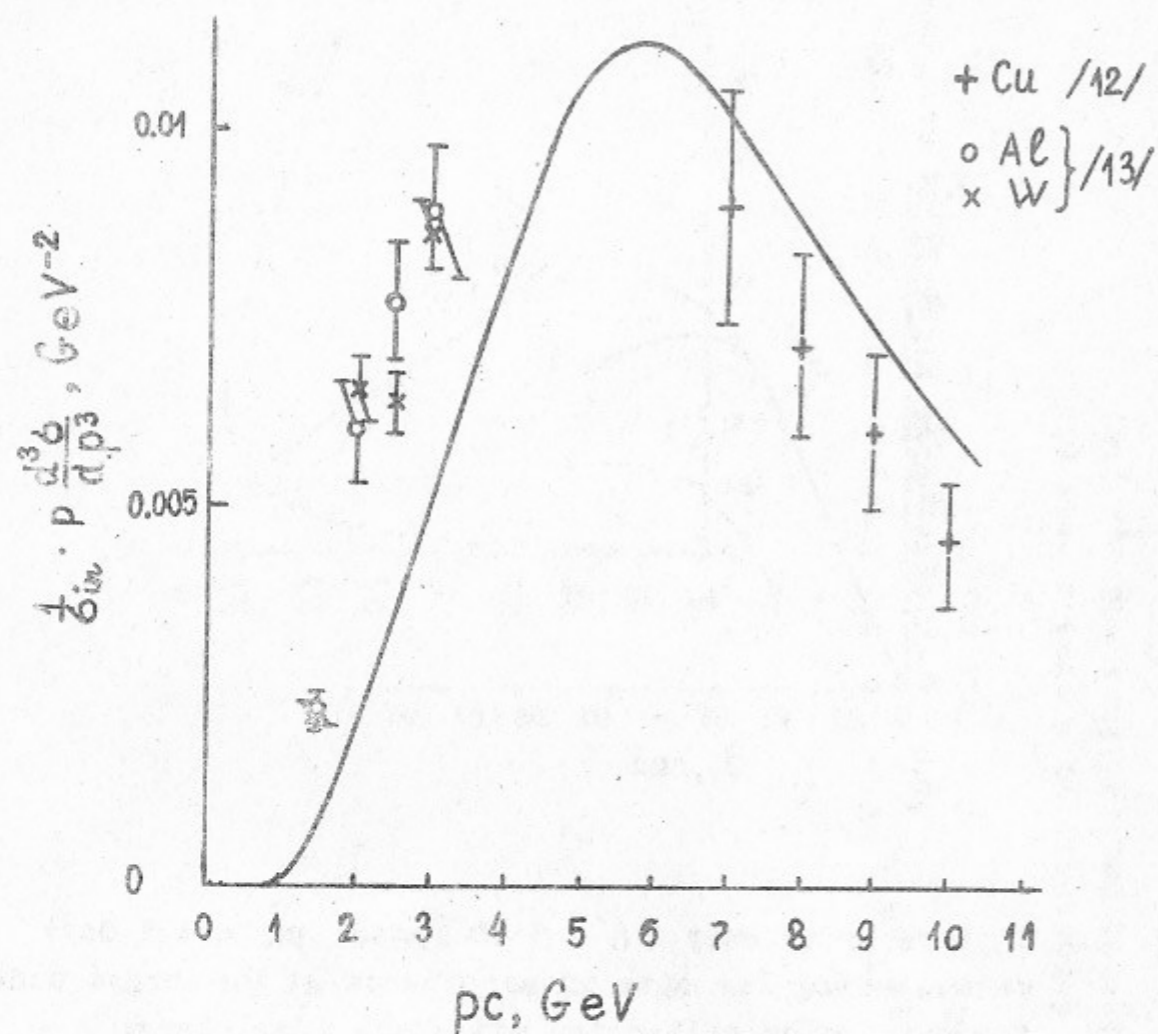


Fig. 5. Antiproton production cross-section versus a momentum. Solid line - the data /10,11/, extrapolated to low momenta under the symmetry of $E \frac{d^3 b}{d p^3}$ versus c.m.s. rapidity; the points - data /12,13/.

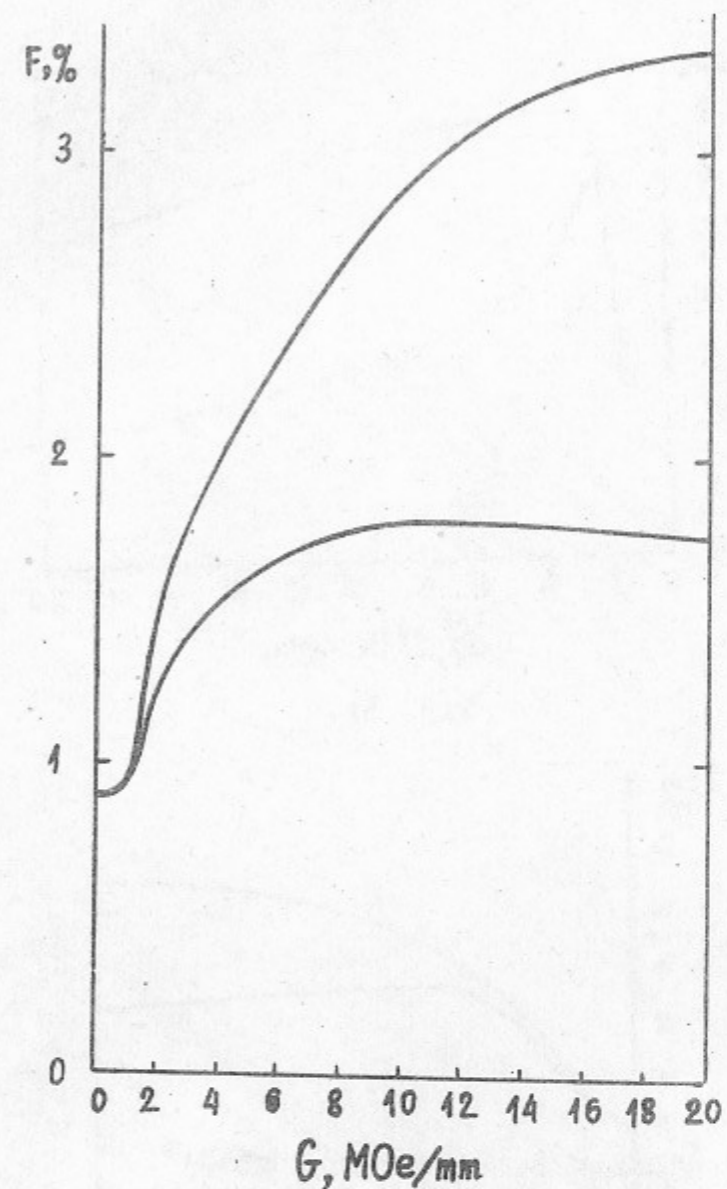


Fig. 6a.

Fig. 6. Capture efficiency (a) and optimum target length (b) dependence on a magnetic field gradient inside the target for $5 \cdot 10^{-6}$ mrad acceptance \mathcal{E} , 4.5 GeV/c antiproton momentum p , 80 GeV (1) and 800 GeV (2) proton energies E_0 , $3 \cdot 10^{-3} \text{ mm}^2$ mean square spot radius $\langle r_0^2 \rangle$ the proton beam is focused in.

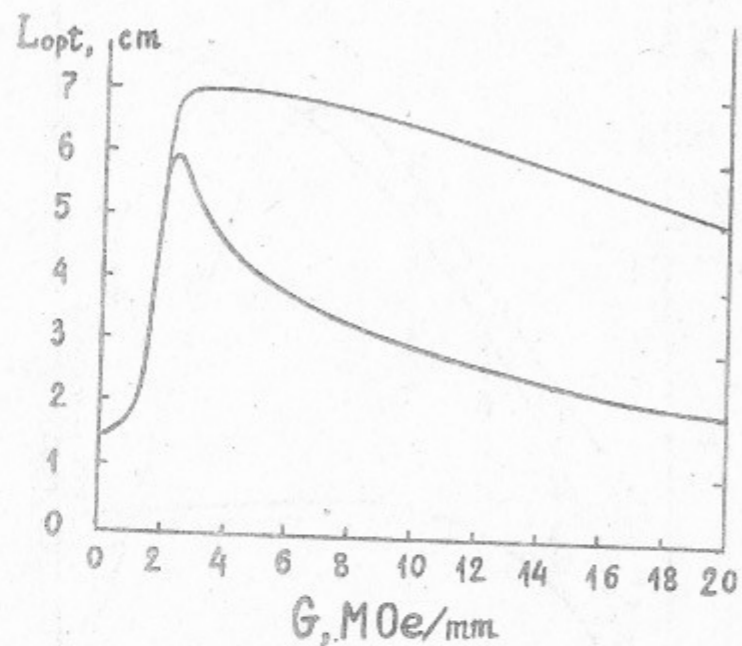


Fig. 6b.

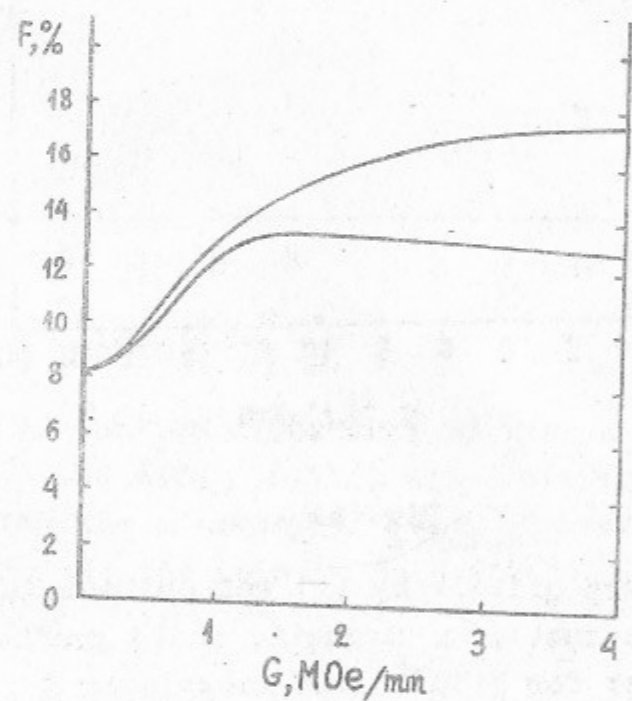


Fig. 7. The same as in figure 6a for $\xi = 6 \cdot 10^{-5}$ mrad,
 $p = 5.5$ GeV/c, $E_0 = 70$ GeV (1) and 350 GeV (2),
 $\langle r_0^2 \rangle = 0.1$ mm².

Работв поступила - 4 декабря 1980 г.

Ответственный за выпуск - С.Г. Попов
 Подписано к печати 15.XII-1980 г. МН 13632
 Усл. 1,3 печ.л., 1,1 учетно-изд.л.
 Тираж 170 экз. Бесплатно
 Заказ № 222.

Отпечатано на ротапринте ИЯФ СО АН СССР